




SELFPAY 1060C

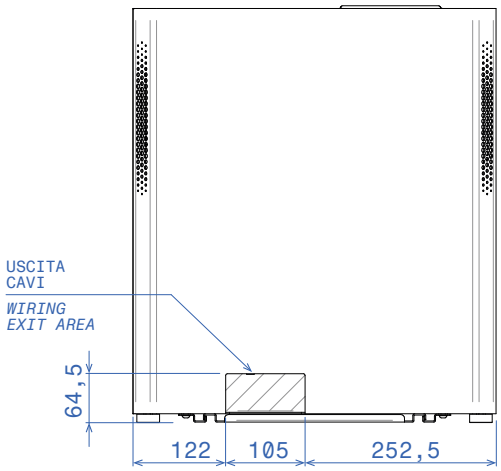

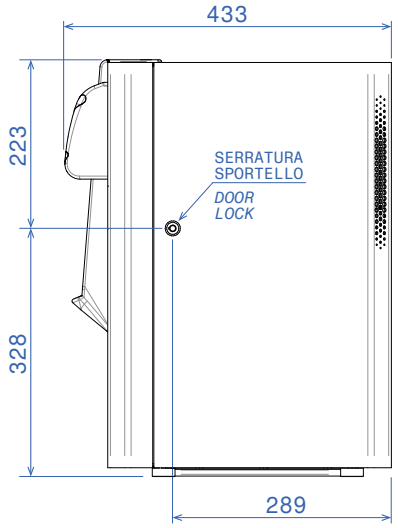

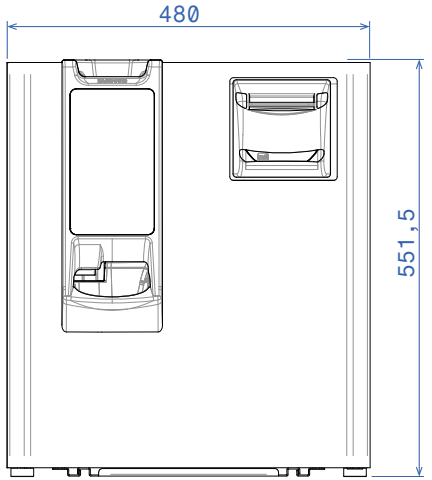


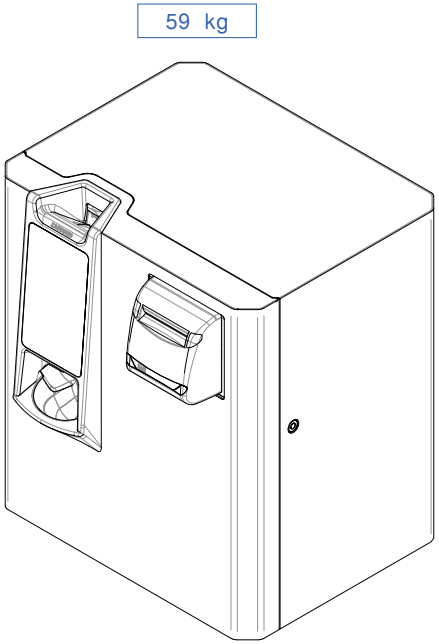

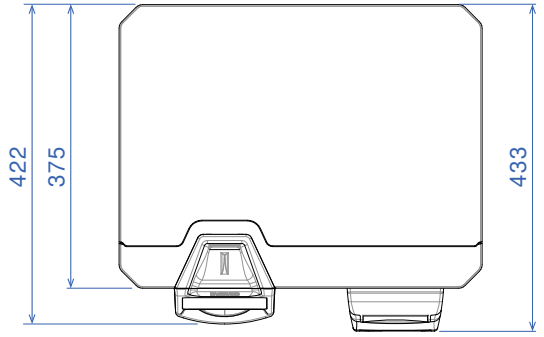

VISTA DALL'ALTO
PER FORATURE
FISSAGGIO PIASTRA:
6 fori Ø6

TOP VIEW FOR
THE DRILLINGS OF
THE FIXING PLATE:
6 holes Ø6

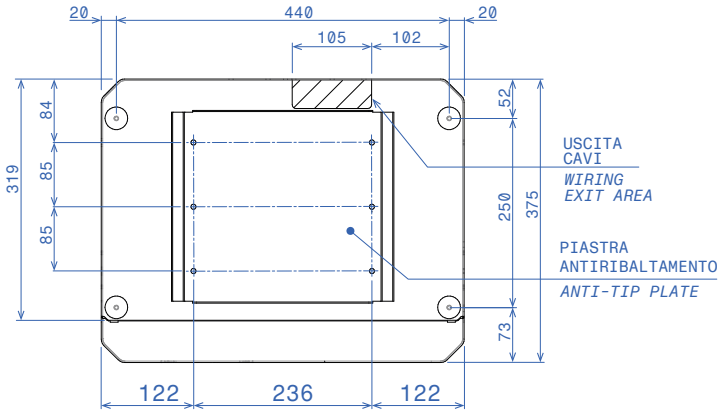


A4 - 1:10 - millimiters


CASHMATIC


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CASHMATIC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CASHMATIC IS PROHIBITED

SELFPAY 1060C STAND FISSO


SP1060C + STAND
1:20 - millimiters

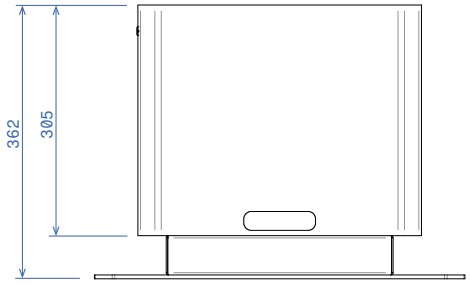

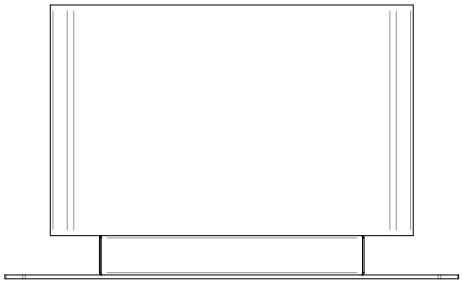


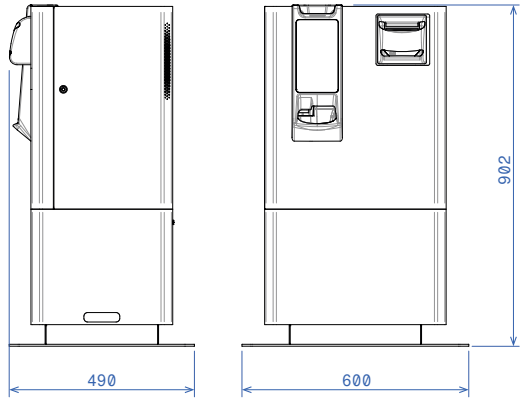

87 kg tot.

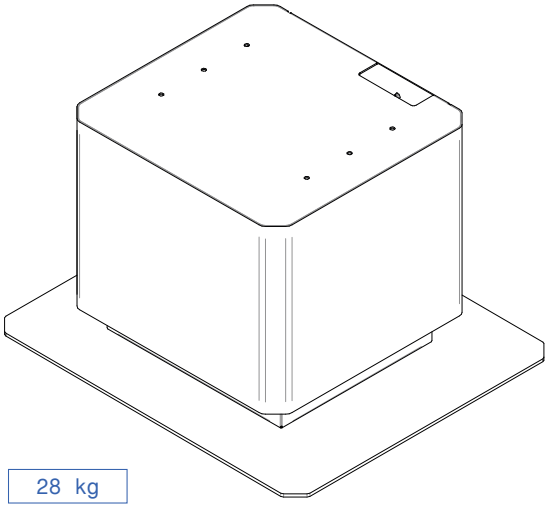

28 kg

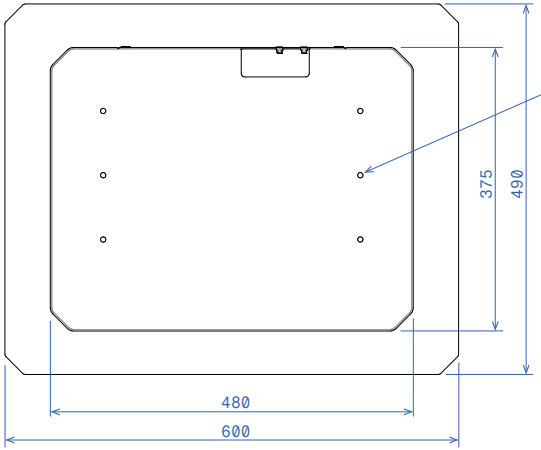

Il fissaggio tra SelfPay e stand avviene
tramite le forature sul fondo macchina.
La piastra antiribaltamento è da rimuovere.

The SelfPay is attached to the stand
using the holes on the bottom of the machine.
The anti-tip plate must be removed.

A4 - 1:10 - millimiters

CASHMATIC

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CASHMATIC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CASHMATIC IS PROHIBITED